


Fender Mount



FEN1001

Instructions

Step:1

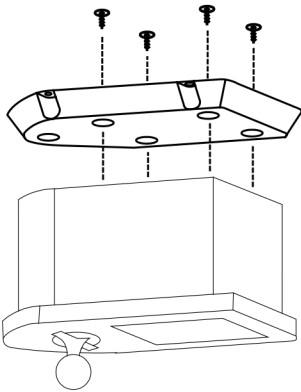


Step 1) Turn Ball Washer upside down. Place Fender Mount upside down on bottom of Ball Washer. Now, secure Fender Mount using the four black screws provided.

Note: Front hole on Fender Mount is not used.

Step 2) Locate a level surface on back of Golf Cart or Work Bench. Using the four black screws provided with Fender Mount, attach to the Golf Cart Fender or Bench.

Step:2

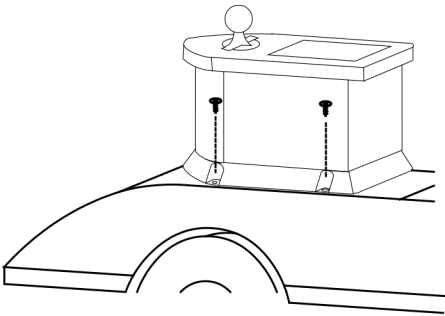


DOUBLE SIDED TAPE OPTION:

- 1) Attach the Ball Washer to mounting bracket with four of the black headed screws provided.
- 2) Clean and Dry the four outside mounting areas, (located on the bottom of mounting plate) with isopropyl alcohol.
- 3) Take the two-sided tape and peel off one side. Attach it with firm pressure to clean dry areas.
- 4) Locate a level surface for your unit, clean the area with isopropyl alcohol and dry. Peel off remaining paper and apply to designated area with firm pressure.

Please Note: With Option Two, four of the black screws will not be used. Ball Washer must be mounted on a level surface for both sides to drain properly.

Alternative Mounting

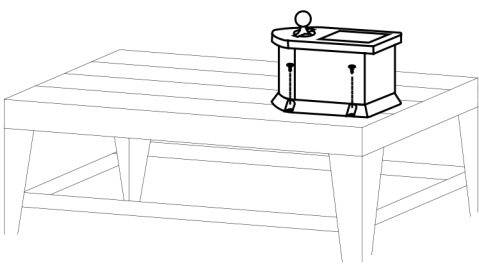

Alternative Mounting, same as Step 2

Tools Required

#2 Phillips

